

Eyecatchers
* From design to art *



jaga

ACCOLADE DECO
Soft warmth in soft forms

www.
THE RADIATORFACTORY
.COM



ACCOLADE DECO, SOFT WARMTH IN SOFT FORMS

A towel rail radiator that does not only radiate warmth but also creates a distinctive appearance. No longer straight and jagged, but a natural appearance, with gently curved radiation tubes that end in subtle triangular collectors.

OUTPUT

	code	height	length	color	conn.
ORDER CODE:	ACDW.	089	050	XXX	/18

mean T °F (°C)	L				
	19.5" H (050)	25.5" (065)	31.5" (080)	37.5" (095)	
170 (76.7)	35"	2351	2974	3592	4215
160 (71.1)	(089)	2066	2614	3158	3706
130 (54.4)	1265	1602	1938	2275	
110 (43.3)	786	997	1207	1417	
170 (76.7)	48"	3124	4007	4891	5774
160 (71.1)	(122)	2743	3523	4304	5084
130 (54.4)	1675	2163	2650	3137	
110 (43.3)	1038	1348	1656	1965	
170 (76.7)	60"	3837	4925	6012	7100
160 (71.1)	(153)	3366	4331	5295	6260
130 (54.4)	2050	2660	3271	3882	
110 (43.3)	1267	1659	2051	2443	
170 (76.7)	71.5"	4492	5734	6971	8212
160 (71.1)	(181)	3939	5043	6144	7248
130 (54.4)	2393	3100	3806	4514	
110 (43.3)	1476	1935	2392	2852	
170 (76.7)	84.5"	5296	6674	8053	9432
160 (71.1)	(215)	4640	5872	7104	8336
130 (54.4)	2810	3614	4416	5219	
110 (43.3)	1729	2258	2785	3315	

BTU/hr with 65°F (18.3°C) entering air and 1 GPM flow rate.


CONNECTION POSSIBILITIES

ORDER CODE: ACDW. 089 050 XXX /18

1° number = flow
2° number = return

Standard connection


Connection 18 or 81.



ORDER CODE:
ACDW. 089 050 XXX /18

Top end connection


Code 45 or code 54



The Accolade is a symmetrical radiator that can be mounted either way up. Insert pipe is to be mounted in the return. It is delivered without surcharge if you specify the ordering code with code 45 or 54 instead of 18, make sure there is an air vent on the central heating pipework.

ORDER CODE:
ACDW. 089 050 XXX /45

DIMENSIONS

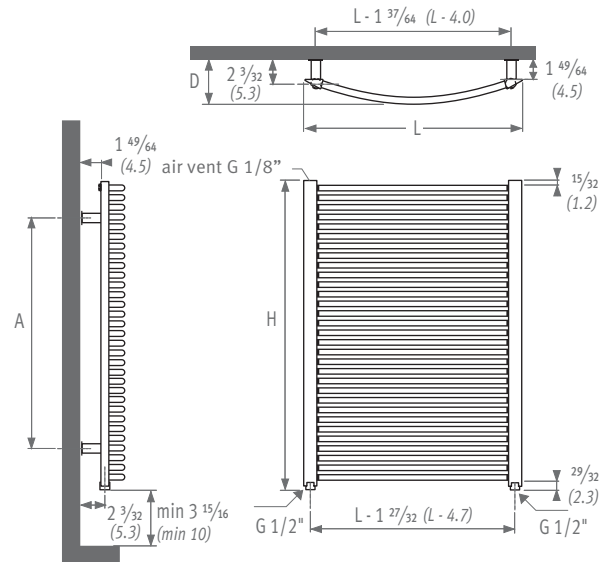

L	19 11/16 (50)	25 19/32 (65)	31 1/2 (80)	37 13/32 (95)
D	4 1/16 (10.3)	4 11/64 (10.6)	4 7/32 (10.7)	4 21/64 (11.0)

H	35 5/64 (89.1)	48 5/16 (122.7)	60 7/16 (153.5)	71 29/64 (181.5)	84 11/16 (215.1)
A	26 3/8 (67.0)	39 49/64 (101.0)	51 49/64 (131.5)	53 15/16 (137.0)	53 15/16 (137.0)

Note: dimensions in "()" are shown in centimeters.

RANGE

